


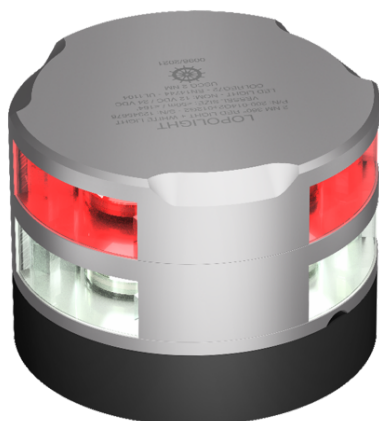

2nm 360° Red+2nm 360° White w/strobe, silver

200-014G2+012G2S

2nm 360° Red+2nm 360° White w/strobe, silver
Horizontally mounted with 0.75m cables

Specifications

Number 200-014G2+012G2S

Light Color Red,White

Dimensions metric Ø92,5mm x 68mm

Certification This Navigation Light is certified by DNV, the Declaration of conformity and the certificates can be found on www.lopolight.com under [Service & Support](#)

Intensity >5.4cd

Dimensions imperial Ø3.6" x 2.7"

Approved to COLREG72,EN14744,IEC 60945,IACS E10,USCG,ABS,M.E.D.,DNV,LR

Visibility 2nm

Operating temperature -25°C to 55°C

Mounting Horizontal

Materials Silver anodized aluminum 25μ, PMMA lens, A4 stainless steel screws, Epoxy, Polyurethane

Operating Voltage 10-32VDC

EAN 5704438019676

IP rating IP68

UPC Code 879343019808

Connection 0.7m cable

Current consumption (mA @ 12VDC) 150

Current consumption (mA @ 24VDC) 85

Specifications

Vessel size	Under 12M,12-20M,20-50M
--------------------	-------------------------

Weight (Kg)	0.82 Kg
--------------------	---------

Weight (Oz)	28.92 Oz
--------------------	----------