


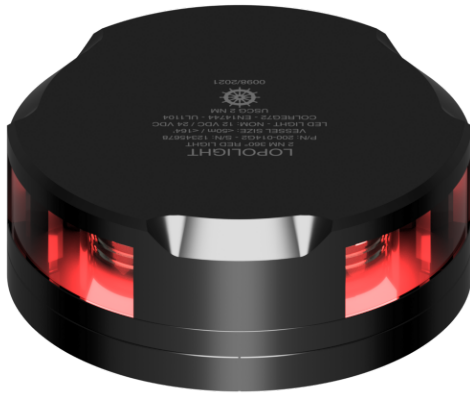

2nm 360° Red, black w/FB base

201-014-FB-B

2nm 360° Red, black w/FB base
Horizontally mounted with 0,7m cable
FB (flat base) POM mounting system

Specifications	
Number	201-014-FB-B
Light Color	Red
Dimensions metric	Ø92,5mm x 36mm
Certification	This Navigation Light is certified by DNV, the Declaration of conformity and the certificates can be found on www.lopolight.com under Support
Dimensions imperial	Ø3.6" x 1.4"
Approved to	COLREG72,EN14744,IEC 60945,IACS E10,USCG,ABS,M.E.D.,DNV,LR
Visibility	2nm
Included In Package	1 Navigation light,Installation guide,precabled with 0.75 meter shielded marine grade cable
Operating temperature	-25°C to 55°C
Mounting	Horizontal
Materials	Black anodized aluminum 25µ, PMMA lens, A4 stainless steel screws, Epoxy, Polyurethane
Operating Voltage	10-32VDC
EAN	5704438043015
IP rating	IP68
Power draw (W)	2,1
UPC Code	879343043148
Connection	0.7m cable
Current consumption (mA @ 12VDC)	150

Specifications	
Current consumption (mA @ 24VDC)	85
Vessel size	Under 12M,12-20M,20-50M
Min. feed wire gauge	0.5mm2 AWG22
Weight (Kg)	0.45 Kg
Weight (Oz)	15.93 Oz